

New!

MILLER
Turbo
Lite™

PERSONAL FALL LIMITER

**COMPACT &
LIGHTWEIGHT**
ONLY 1.9 lbs. (.86kg)

- Never Need a Shock-Absorbing Lanyard Again
- Reduces Risk/Liability



Actual Size

**PEAK
PERFORMANCE**

MILLER®
by SPERIAN



MILLER **TurboLite™**

PERSONAL FALL LIMITER

**Never need a
shock-absorbing lanyard
AGAIN!**

The cost-effective and competitive pricing of the new Miller TurboLite™ Personal Fall Limiters will make shock-absorbing lanyards obsolete on the jobsite. With the compact and lightweight TurboLite PFL, workers will no longer need to “switch-out” equipment to maintain a safe fall distance.


MILLER TURBOLITE PFL FEATURES INCLUDE:

- First affordable alternative to shock-absorbing lanyards
- Extremely compact and lightweight (1.9 lbs. [.86kg]) provides 6 ft. (1.8m) working capacity lifeline; unit attaches directly to the harness back D-ring for greater mobility and versatility
- Engineered webbing for greater abrasion resistance and long service life
- High-strength, impact-resistant nylon housing for maximum durability
- Built-in swivel prevents lifeline from twisting
- Rated for up to a 400 lb. (181.4kg) user
- No annual factory recertification required
- Meets global standards for international companies; meets all applicable OSHA, ANSI A10.32 and Z359-2007, and CSA standards

The benefits will have a positive impact on your safety concerns and your bottom line:

- Eliminates the need for different fall protection equipment to address fall clearance
- Reduces risk because workers are using the proper equipment when fall clearance changes
- Increases productivity by keeping workers on the job longer
- Miller TurboLite Personal Fall Limiters are competitively priced with shock-absorbing lanyards and will keep safety costs in line

FAST-ACTING FALL PROTECTION YOU CAN TRUST

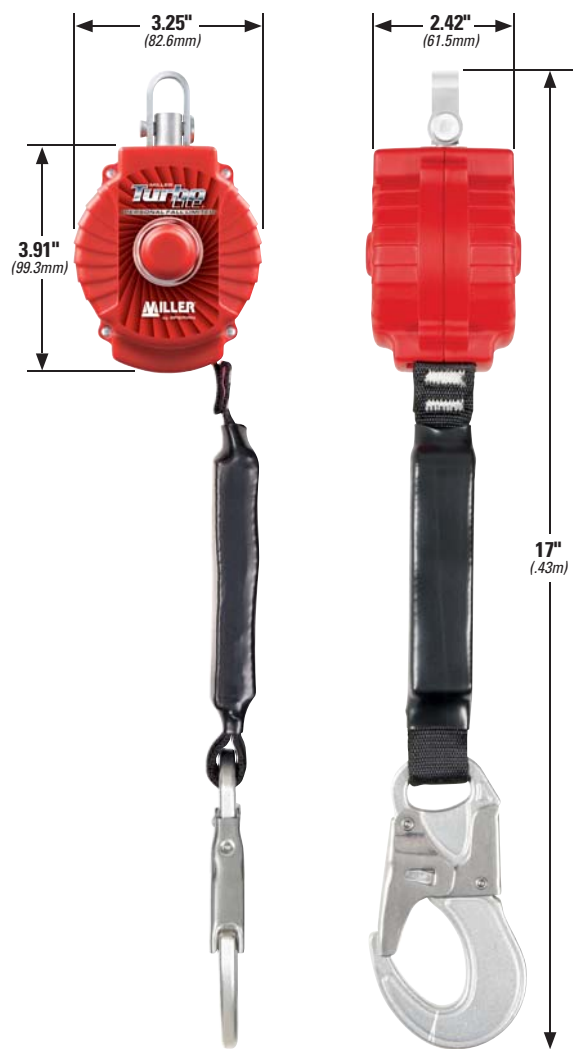

SPECIFICATIONS


MATERIALS

Housing:	High impact nylon
Hub:	Shock-absorbing engineered co-polymer
Braking Mechanism:	Stainless steel
Webbing:	Vectron core, polyester jacket 1" wide x 0.06" thick (25.4mm x 1.5mm)
Snap Hook:	Aluminum, locking snap hook with 3/4" (19.1mm) gate opening


TECHNICAL

Maximum Working Load:	400 lbs. (181.4kg)
Working Capacity:	6 ft. (1.8m) web lifeline
Maximum Arresting Force:	<900 lb./f (4kN) for up to 310 lbs. (140.6kg) working load <1800 lb./f (8kN) for up to 400 lbs. (181.4kg) working load
Weight:	1.9 lbs. (.86kg) (Model MFL-11/6 ft)

The unique 6-foot (1.8m) TurboLite PFL provides the same working capacity as a traditional shock-absorbing lanyard while instantly arresting a free fall within inches rather than the 3-1/2 feet (1.1m) needed for lanyards.

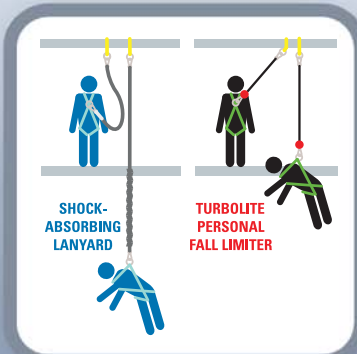

**REQUIRES LESS
FALL CLEARANCE**

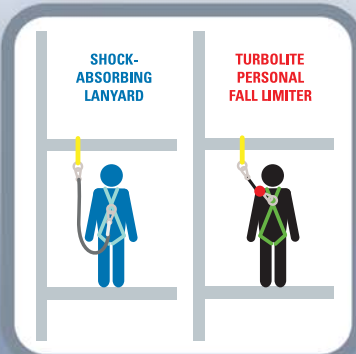

**PREVENTS
TRIPPING HAZARD**

TurboLite™ Personal Fall Limiter (PFL)

SKU	Description and Unit Connector	Lanyard End Connector
ANSI Z359-2007 Compliant		
MFL-1-Z7/6FT	TurboLite w/Steel Twist-Lock Carabiner	ANSI Z359-2007 Compliant Locking Snap Hook
MFL-2-Z7/6FT	TurboLite w/Steel Twist-Lock Carabiner	ANSI Z359-2007 Compliant Locking Rebar Hook
MFL-3-Z7/6FT	TurboLite without unit connector	ANSI Z359-2007 Compliant Locking Snap Hook
MFL-4-Z7/6FT	TurboLite without unit connector	ANSI Z359-2007 Compliant Locking Rebar Hook
MFL-5-Z7/6FT	TurboLite without unit connector	ANSI Z359-2007 Compliant Locking Swivel Snap Hook
MFL-9-Z7/6FT	TurboLite w/ANSI Z359-2007 Compliant Locking Snap Hook	ANSI Z359-2007 Compliant Locking Snap Hook
MFL-10-Z7/6FT	TurboLite w/ANSI Z359-2007 Compliant Locking Snap Hook	ANSI Z359-2007 Compliant Locking Rebar Hook
ANSI A10.32 Compliant		
MFL-1/6FT	TurboLite w/Steel Twist-Lock Carabiner	Locking Snap Hook
MFL-2/6FT	TurboLite w/Steel Twist-Lock Carabiner	Locking Rebar Hook
MFL-3/6FT	TurboLite without unit connector	Locking Snap Hook
MFL-4/6FT	TurboLite without unit connector	Locking Rebar Hook
MFL-5/6FT	TurboLite without unit connector	Locking Swivel Snap Hook
MFL-6/6FT	TurboLite without unit connector	Locking Swivel Rebar Hook
MFL-7/6FT	TurboLite w/D-ring Swivel Hook	Locking Snap Hook
MFL-8/6FT	TurboLite w/D-ring Swivel Hook	Locking Rebar Hook
MFL-9/6FT	TurboLite w/Locking Snap Hook	Locking Snap Hook
MFL-10/6FT	TurboLite w/Locking Snap Hook	Locking Rebar Hook
MFL-11/6FT	TurboLite w/Aluminum Twist-Lock Carabiner	Aluminum Locking Snap Hook
MFL-12/6FT	TurboLite w/Aluminum Twist-Lock Carabiner	Aluminum Locking Rebar Hook

Unit Connectors



Steel Twist-Lock Carabiner
1" (25.4mm) Gate Opening



ANSI Z359-2007 Locking Snap Hook
3/4" (19.1mm) Gate Opening



D-Ring Swivel Hook
3/8" (9.5mm) Gate Opening



Locking Snap Hook
3/4" (19.1mm) Gate Opening



Aluminum Twist-Lock Carabiner
1" (25.4mm) Gate Opening



Without Unit Connector

Lanyard End Connectors



ANSI Z359-2007 Locking Snap Hook
3/4" (19.1mm) Gate Opening



Locking Snap Hook
3/4" (19.1mm) Gate Opening



Locking Swivel Rebar Hook
2-1/2" (63.5mm) Gate Opening



ANSI Z359-2007 Locking Rebar Hook
2-1/2" (63.5mm) Gate Opening



Locking Rebar Hook
2-1/2" (63.5mm) Gate Opening



Aluminum Locking Snap Hook
3/4" (19.1mm) Gate Opening



ANSI Z359-2007 Locking Swivel Snap Hook
3/4" (19.1mm) Gate Opening



Locking Swivel Snap Hook
3/4" (19.1mm) Gate Opening



Aluminum Locking Rebar Hook
2-1/2" (63.5mm) Gate Opening

This equipment should only be used in conjunction with the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.



▶ Ask the Expert ... Ask Miller.

800/873-5242
or 814/432-2118

Fax 800/892-4078
or Fax 814/432-2415

www.millerfallprotection.com



For more information or to place an order, please contact your Miller® distributor:

LMTL/0308/30M/RPI